

EasyLoad


No More Heavy Lifting!

The EasyLoad stands out against all the other loading systems. Using the electrically powered extending boom you can easily lift loads up to 500 kg and then position them within the loading area of the vehicle. The boom and winch are operated electrically with a single press of the button. The handy mobile control unit can be operated very simply with one hand. You don't require any other equipment and you don't have to rely on the facilities available at the delivery or collection point.

The EasyLoad relieves drivers and employees and helps avoid Health & Safety at Work problems. Especially the avoidance of back complaints which crop up as a rule with repeated lifting and sliding heavy loads.

The EasyLoad increases the flexibility and productivity of your fleet through improved loading capacity and vehicle deployment. In many situations a

second man (driver's mate) is unnecessary.

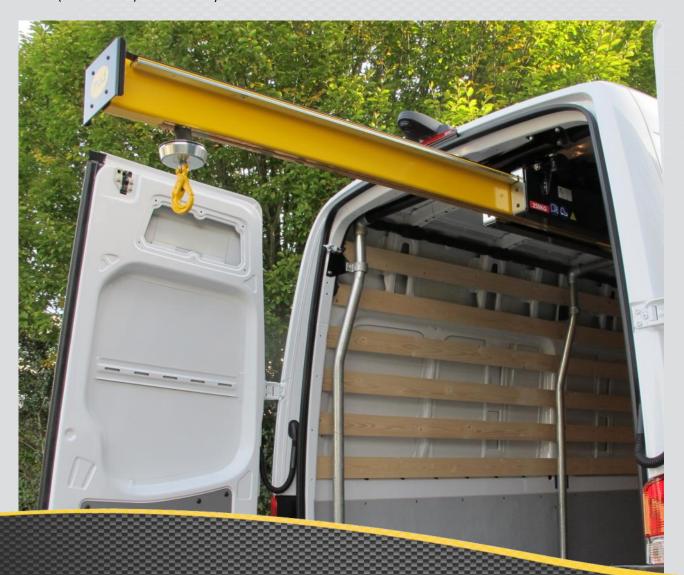

www.easy-load.com.au



EasyLoad

On board loading system

The EasyLoad onboard loading system


consists of a high quality, compact winch unit with extendable boom. The stable lightweight construction guarantees absolute reliability and is maintenance-free.

The installation couldn't be easier. The EasyLoad is mounted on a lightweight, self-supporting subframe which is positioned by an attachment to the existing anchor points in the vehicle loading area. Only two cables have to be connected for the power supply from the vehicle - expensive modifi cations are unnecessary.

When vehicles are exchanged, the EasyLoad can easily be un-installed and re-installed again - thus avoiding wasted capital!

Custom-made sub-frames are available for most popular light commercial vehicles.



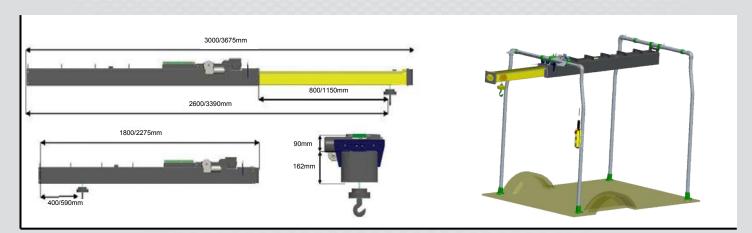

Technical data:

Short version Long version Maximum lifting capacity: 250 kg 250 and 500kg Length when retracted: 227,5 cm 190 cm Maximum load height: 300 cm (minus the height of the interior space)

Dead weight: 100 kg (including winch, but excluding Installation frame)

Winch specification: 12V 100A

Winch operation: electric via pushbutton on hand-held unit Slide system: electric via pushbutton on hand-held unit

Lifting speed: 10 cm per second

Cable thickness: ø 5 mm Average installation time:

Installation frames available: Citroën, Fiat, Ford, Iveco, Mercedes, Nissan, Opel, Peugeot, Renault, Volkswagen etc.

Safety: CE, NEN-EN-14492-2

Aeroz Products

2 Mosrael Place Rowville VIC

(03) 9753 4555 Mobile. 0400 842141

E-mail: sales@aerotrans.com.au

www.easy-load.com.au